

# Table of Contents

<b>TimeTablePlugin.....</b>	<b>1</b>
Features.....	2
Syntax Rules.....	2
Attributes.....	3
Examples.....	6
Plugin Settings.....	7
Known Issues and Bugs.....	8
Plugin Installation Instructions.....	8
Plugin Info.....	9

# TimeTablePlugin

The TimeTablePlugin handles the tag %TIMETABLE% and creates a weekly timetable. The timetable is rendered with HTML tables and should work with all modern web browsers. Please take a look at the feature list for more information.

It also handles the tag %TTCM% (TimeTable Compatibilty Mode). The compatibility mode allows the usage of all TWiki:Plugins.CalendarPlugin event types. The %TTCM% tag should be placed into the description field of an event and must contain a time range and optional colors in a comma separated list (<time range>[['', '<foreground color>'] ['', '<background color>]]), e.g:  
you type:


```
* 22 May 2006 - %TTCM{"7:00-1:00pm,white,black"}% Meeting
* 23 May 2006 - 24 May 2006 - %TTCM{"7am-4pm,yellow"}% Conference
```


you get:

- 22 May 2006 - Meeting
- 23 May 2006 - 24 May 2006 - 07:00am-04:00pm Conference

The %TTTOPICSETUP% (TimeTable Topic Setup) tag allows you to define default foreground/background colors (eventfgcolor/eventbgcolor attributes) and a time zone (timezone attribute) for all events on a topic. Please use it only once on a topic.

**Examples: (png images):**

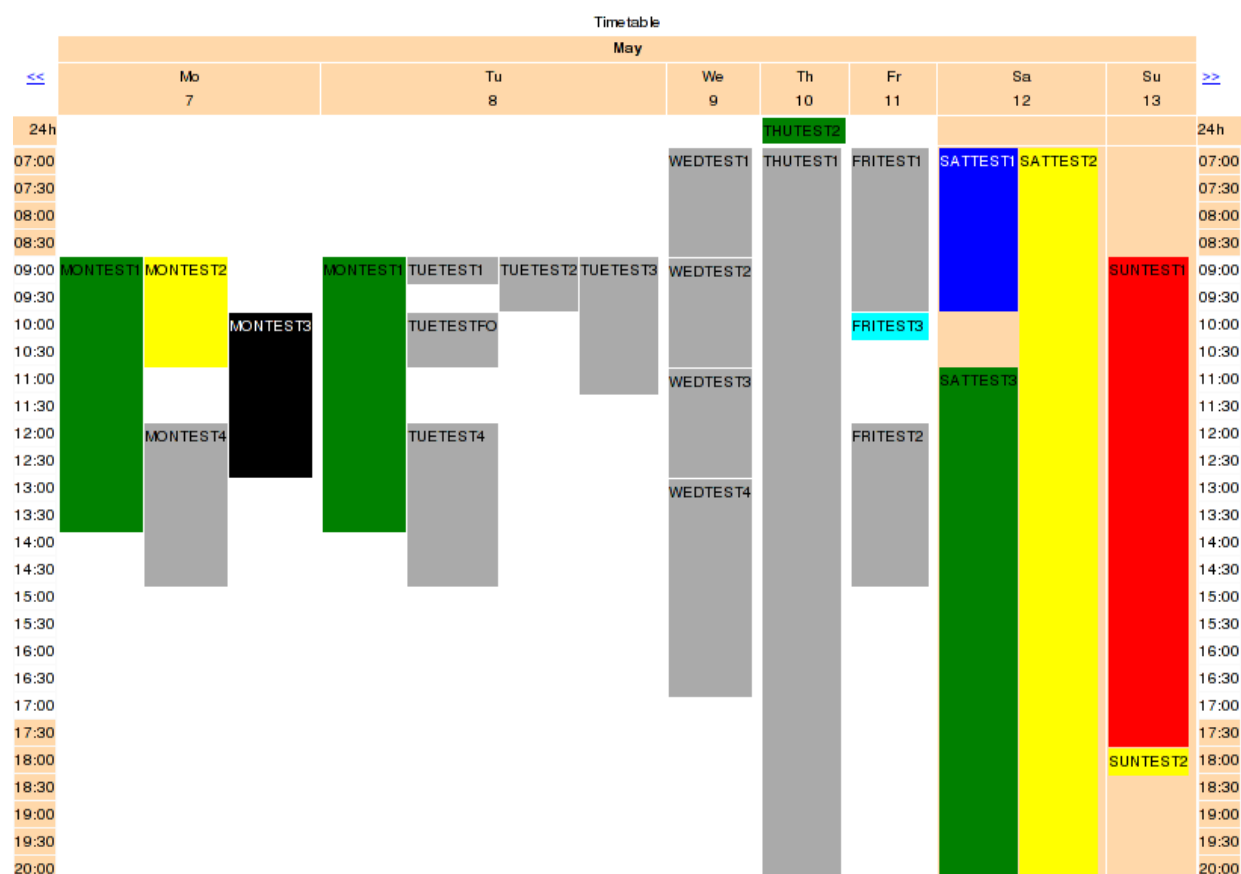

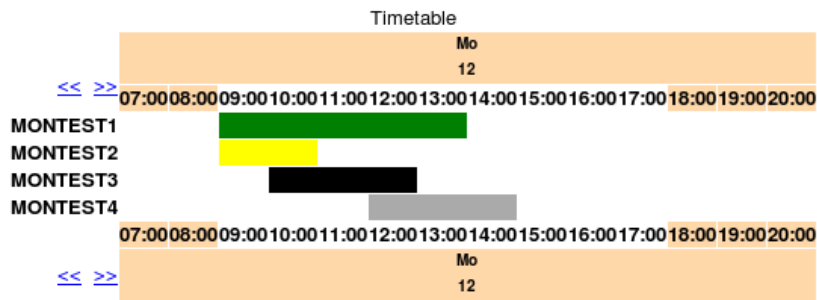

## Features

The TimeTablePlugin supports

- two time formats: 12 and 24 hour format (attribute: `timeformat`)
- (self-defined) time zones (attributes: `timezone`, `timezoneabbr`)
- all HolidaylistPlugin and CalendarPlugin event types if the compatibility mode is enabled (`compatmode="on"`)
- navigation to other weeks (only if compatibility mode is enabled: `compatmode="on"`)
- own colors for every event (add the foreground/background colors to a event definition or use the `%TTCM%` tag of the compatibility mode)
- event definitions from other topics (attribute: `topic`) - including overwrite of the time zone (e.g. `topic="EvenTopic2:-3"`)
- customization of
  - ◆ all text outputs and colors (attributes: `name`, `headerformat`, ...)
  - ◆ the table rendering (attributes: `days`, `startdate`, `timeinterval`, `showtimeline`, ...)
- a default setup for foreground/background colors and time zone on a topic (`%TTTOPICSETUP%` tag)
- URL parameters: all attribute settings can be overwritten by URL parameters (`ttp_<attribute>=<value>`), e.g.  
`TimeTablePlugin?ttp_days=14;ttp_tableborder=10;ttp_descrlimit=7`
- ...

## Syntax Rules

Events are defined with bullets. Following event types are supported to define entries for the timetable:

Event Type	Syntax	Example(s)
Single	* DDD - HH:MM - HH:MM - description	* Mon - 09:00 - 11:00 - Meeting
	* DDD - HH:MM - HH:MM - description - background color	* Mon - 09:00 - 11:00 - Meeting - green
	* DDD - HH:MM - HH:MM - description - foreground color, background color	* Mon - 09:00 - 11:00 - Meeting - white,black
List	* DDD, DDD, ... - HH:MM - HH:MM - description	* Mon, Tue - 08:00 - 8:15 - Breakfast

Event Type	Syntax	Example(s)
	* DDD, DDD,... - HH:MM - HH:MM - description - background color	* Mon,Tue - 08:00 - 8:15 - Breakfast - yellow
	* DDD, DDD,... - HH:MM - HH:MM - description - foreground color, background color	* Mon,Tue - 08:00 - 8:15 - Breakfast - white,black
Interval	* DDD - DDD - HH:MM - HH:MM - description	* Mon - Fri - 12:15 - 13:00 - Lunch
	* DDD - DDD - HH:MM - HH:MM - description - background color	* Mon - Fri - 12:15 - 13:00 - Lunch - green
	* DDD - DDD - HH:MM - HH:MM - description - foreground color, background color	* Mon - Fri - 12:15 - 13:00 - Lunch - white,black
Duration	instead of an end time (HH:MM) in a time range of a single/list/interval event you can define an event duration in days (d), hours (h) and/or minutes (m), e.g. one day: 1d ; one day and two hours: 1:2d ; one day, two hours and 30 minutes: 1:2:30d ; two hours: 2h ; two yours and 30 minutes: 2:30h ; 30 minutes: 30m	* Mon - 10:00 - 2h - every Monday 2 hours at 10 o'clock

If you enable the compatibility mode (see Attributes or Plugins Settings sections) you can also use all TWiki:Plugins.CalendarPlugin event types. Examples:

```
%TIMETABLE{compatmode="1" startdate="12 Jun 2006"}%

* 12 Jun - %TTCM{"10am-5pm,yellow"}% Every 12th of June between 10am and 5pm
* E Wed - Every Wednesday (whole-time)
* 12 Jun 2006 - 19 Jun 2006 - %TTCM{"12:15pm-1pm,white,black"}% Lunch with Mary
* 13 Jun 2006 - 10:00-12:00 Meeting
* 14 Jun 2006 - Meeting - 01pm-03pm,green
```

#### Notes:

- The parameter of the %TTCM% tag **must not contain any whitespaces**.
- Time ranges in a description field **must not contain any whitespaces**.
- If no %TTCM% tag or no time range was specified in a description of a TWiki:Plugins.CalendarPlugin event the event gets a full-time event (12:01am-11:59pm o'clock, 0-24h).

## Attributes

Usage: %TIMETABLE{attribute1="value1" attribute2="value2" ...}%

Example: %TIMETABLE{lang="Deutsch" timeinterval="15" }%

Attribute	Comment	Default/Example
<b>Behavior:</b>		
clicktooltip	if enabled JavaScript tooltips are only shown with a mouse click to the table cell instead of 'mouse over'	clicktooltip="off"

## TimeTablePlugin &lt; TWiki &lt; TWiki

Attribute	Comment	Default/Example
	(related: clicktooltiptext)	
compatmode	if set to "1" all TWiki:Plugins.CalendarPlugin event types are supported (related: compatibility mode attributes); ⚠ the description field can contain a time range (without any whitespaces, e.g. 1pm-2pm) or a %TTCM%-Tag (e.g. <b>%TTCM{ "7:00-1:00pm,white,black" }%</b> ) with a time range and optional foreground and background color and <b>without</b> any whitespaces	compatmode="0"
days	days to show	days="7"
endtime	a end time, e.g. 18:00, 6:00pm, ...	endtime="8:00pm"
lang	Language used for weekdays in the table header and for event entries (e.g: English, Deutsch, Français, Español, Nederlands, Dansk, suomi, ...)	lang="English"
rotatetable	enables/disables table rotation	rotatetable="off"
showweekend	show weekend if set to '1'	showweekend="1"
starttime	a start time, e.g. 7:00, 8a.m., 9:15a.m. ...	starttime="7:00am"
textwrapper	sets the text wrapper for the event entry text (default: browser); plugin: text is wrapped by the TimeTablePlugin (old behavior but stable); browser: text is wrapped by the web browser	textwrapper="plugin"
timeformat	time format; allowed values: 12, 12am, 12p.m., 12a.m., 12p.m. and 24	timeformat="24"
timeinterval	interval steps in minutes for the timeline	timeinterval="30"
timezone	a hour offset (allowed values: -12 ... 0 ... +12) for time correction or a time zone abbreviation (e.g. UTC, CET ...)	timezone="0"
timezoneabbr	a comma separated list of time zone abbreviations with UTC offsets; the standard time zone abbreviations will be extended with this user defined abbreviations	timezoneabbr="CET:+1, MEST:+2"
topic	a comma separated list of source topics; you can add a time zone to any source topic name by adding a ':' and a hour offset (-12 ... +12) or a time zone abbreviation, e.g: topic="MySourceTopic:-2" ⚠ this time zone feature overwrites the timezone attribute of a %TTTOPICSETUP% tag	topic="%TOPIC%"
wholetimerow	enables/disables a whole-time event row (related attributes: wholetimerowtext, wholetimerowtitle)	wholetimerow="0"
workingendtime	working hours end time	workingendtime="5:00pm"
workingstarttime	working hours start time	workingstarttime="9:00am"
<b>Compatibility Mode:</b> (⚠ compatmode="on" is required ⚠)		
cmheaderformat	table header format of a day; a subset of strftime conversion specifiers is supported (only date not time specifiers; see manual page or TWiki:Codev.ConvergeDateTimeFormattingModels)	cmheaderformat="<font title=\"%A - % size=\"-2\">%a %e</font>"
daynames	custom day names (a list separated by a ' ' and starting on Monday; overwrites lang attribute)	daynames="M T W T F S S"
forcestartdate	if set to 1 the timetable starts with the given startdate ('0' means: the timetable view starts with Monday')	forcestartdate="0"
month	set a month (e.g. Jan, Feb ... or 01, 02, ... 12 ) or a month offset (e.g. +0, +1, -2,...)	month="+1"

Attribute	Comment	Default/Example
monthnames	custom month names (a list separated by ' ' and starting on January; overwrites lang attribute)	monthnames="J F M A M J J A S O N D"
navnext	navigation button to the next n days	navnext="&gt;&gt;";
navnexttitle	title text (tooltip text) for the navigation button to the next n days	navnexttitle="Next %n day(s)"
navprev	navigation button to the previous n days	navprev="&lt;&lt;";
navprevtitle	title text (tooltip text) for the navigation button to the previous n days	navprevtitle="Previous %n day(s)"
startdate	a start date (e.g. '1 Oct 2005') or a day offset (e.g. '10', '+30' or '-30')	startdate="+0"
year	set a year (e.g. 2005, 2006 ...) or a year offset (e.g. +0, +1, -1, ...)	year="+0"
<b>Table formatting:</b>		
clicktooltiptext	tooltip text of table entries if clicktooltip is enabled	clicktooltiptext="Click me for more info"
desclimit	per line character limit for the description (▲ depends on the textwrapper attribute: if textwrapper="plugin" this limit is a character limit; if textwrapper="browser" the width of a event entry table cell is set to <desclimit>em)	desclimit="10"
displaytime	display time in the event description of the timetable	displaytime="0"
eventbgcolor	default background color of an event cell (you can overwrite this with an event entry)	eventbgcolor = "#AAAAAA"
eventfgcolor	default text color of an event cell (you can overwrite this with an event entry)	eventfgcolor = "black"
fontsize	default font size (see Known Issues and Bugs)	fontsize="xx-small"
headerformat	table header format of a day; a subset of strftime conversion specifiers is supported (only date not time specifiers; see manual page or TWiki:Codev.ConvergeDateTimeFormattingModels🔗)	headerformat="<font title=\"%A - %d %size=\"%-2\">%a</font>"
monthheaderbgcolor	month header background color (default: tableheadercolor)	monthheaderbgcolor="%WEBBGCOL"
monthheaderfgcolor	month header text (foreground) color (default: black)	monthheaderfgcolor="black"
monthheaderformat	month header format (related: showmonthheader)	monthheaderformat="%B"
name	header content of the first column	name = "&nbsp;";
nowbgcolor	highlight current time in the timeline with a background color	nowbgcolor="black"
nowfgcolor	highlight current time in the timeline with a foreground color	nowfgcolor="white"
showmonthheader	enables/disables monthheader; if compatmode=on the monthheader is shown by default	showmonthheader="off"
showtimeline	show timeline left, right, or on both sides	showtimeline="both"
tablebgcolor	table background color	tablebgcolor="white"
tableborder	table border (default: undefined)	tableborder="1"
tablecellpadding	table cell padding (default: 0)	tablecellpadding="5"
tablecellspacing	table cell spacing (default: 1)	tablecellspacing="1"
tablecaption	table caption shown above the timetable	tablecaption="Timetable"
tablecolumnwidth	width of a table column (default: undefined)	tablecolumnwidth="80px"
tabledatacellwidth	width of an entry cell (default: undefined); ▲ it has no effect if a tablecolumnwidth was set	tabledatacellwidth="80px"
tableheadercolor	color of the table header	tableheadercolor="%WEBBGCOL"

Attribute	Comment	Default/Example
tablewidth	table width (default: undefined)	tablewidth="100%"
todaybgcolor	highlight today column with a background color	todaybgcolor="black"
todayfgcolor	highlight today column with a foreground color	todayfgcolor="white"
tooltipdateformat	tooltip date format (for %DATE% substitution of tooltipformat); a subset of strftime conversion specifiers is supported (only date not time specifiers; see manual page or TWiki:Codev.ConvergeDateTimeFormattingModels <a href="#">↗</a> )	tooltipdateformat="%y/%d/%m"
tooltipfixleft	positive or negative offset from the left to fix tooltip position	tooltipfixleft="-163"
tooltipfixtop	positive or negative offset from the top to fix tooltip position	tooltipfixtop="0"
tooltipformat	format of a tooltip (substituted variables: %DATE% - date (see tooltipdateformat attribute), %TIMERANGE% - time range, %DESCRIPTION% - description field, %LONGDESCRIPTION% - complete entry)	tooltipformat="%DATE% %TIME% %DESCRIPTION% "
weekendbgcolor	highlight weekends with a column background color	weekendbgcolor="%WEBBGCOLOR%"
weekendfgcolor	highlight weekends with a column foreground color	weekendfgcolor="black"
wholetimerowpos	whole-time event row position (default: top), allowed values: top, bottom, both	wholetimerowpos="top"
wholetimerowtext	text in the time line of the whole-time event row	wholetimerowtext="24h"
wholetimerowtitle	alternate text for the wholetimerowtext	wholetimerowtitle="whole-time events"
workingbgcolor	highlight working hours in the timeline with a background color	workingbgcolor="white"
workingfgcolor	highlight working hours in the timeline with a foreground color	workingfgcolor="black"

**Hints:**

- You can use TextFormattingRules for some attribute values: tablecaption, name, navnext, navprev, wholetimerowtext.
- Every attribute of %TIMETABLE% can also be used as plugin setting. You only have to use capital letters.
- Every attribute setting can be overwritten by URL parameters (ttp\_<attribute>=<value>), e.g. if you add a ?ttp\_days=30 to the topic URL the TimeTablePlugin shows 30 days.

## Examples

```
%TIMETABLE{compatmode="on" wholetimerow="on"}% %TIMETABLE{compatmode="1" startdate="12 Jun 2006" rotatetable="on" days="1" forcestartdate="on" timeinterval="60"}%
```

- Mon,Tue - 9 - 14 - MONTEST1 - green
- Mon - 9 - 11 - MONTEST2 - yellow
- Mon - 10 - 13 - MONTEST3 - white,black
- Mon - 12 - 15 - MONTEST4
- Tue - 9 - 9:30 - TUETEST1
- Tue - 9 - 10:00 - TUETEST2
- Tue - 10:00 - 11:00 - TUETESTFO
- Tue - 9 - 11:30 - TUETEST3
- Tue - 12 - 15 - TUETEST4

- Wed - 7 - 9 - WEDTEST1
- Wed - 9 - 11 - WEDTEST2
- Wed - 11 - 13 - WEDTEST3
- Wed - 13 - 17 - WEDTEST4
- Thu - 7 - 20:30 - THUTEST1
- E Thu - THUTEST2 %TTCM{,green}%
- Fri - 7 - 10 - FRITEST1
- Fri - 12 - 15 - FRITEST2
- E Fri - FRITEST3 %TTCM{10-10:30,cyan}%
- Sat - 5 - 10 - SATTEST1 - white,blue
- Sat - 6 - 21 - SATTEST2 - yellow
- Sat - 11 - 22 - SATTEST3 - green
- Sun - 9:18 - 17:35 - SUNTEST1 - red
- Sun - 18:00 - 18:15 - SUNTEST2 - yellow

## Plugin Settings

Plugin settings are stored as preferences variables. To reference a plugin setting write %<plugin>\_<setting>%, i.e. %NEWPLUGIN\_SHORTDESCRIPTION%

- One line description, is shown in the TextFormattingRules topic:
  - ◆ Set SHORTDESCRIPTION = Render a weekly timetable
- Debug plugin: (See output in data/debug.txt)
  - ◆ Set DEBUG = 0
- Time format (default: 24, allowed: 12, 12pm, 12am, 12a.m.,12p.m., 12PM, 12AM, or 24):
  - ◆ # Set TIMEFORMAT = 12
- Timetable start time (default: 7:00am):
  - ◆ # Set STARTTIME = 7am
- Timetable end time (default: 8:00pm):
  - ◆ # Set ENDTIME = 8pm
- Enable/Disable whole-time event row (default: disabled):
  - ◆ # Set WHOLETIMEROW = 1
  - ◆ # Set WHOLETIMEROWPOS = top
  - ◆ # Set WHOLETIMEROWTEXT = 24h
  - ◆ # Set WHOLETIMEROWTITLE = whole-time events
- Character limitation of a description in a table cell line (default: 10):
  - ◆ # Set DESCRLIMIT = 15
- Show timeline on the left, right or both sides (default: both):
  - ◆ # Set SHOWTIMELINE = left
- Language (default: English - see manual page of Date::Calc perl module, e.g: English, Deutsch, Français, Español, Nederlands, Dansk, suomi, ...):
  - ◆ # Set LANG = Deutsch



- Enable/Disable compatibility mode (default: off) to (dis)allow TWiki:Plugins.CalendarPlugin event types:
  - ◆ # Set COMPATMODE = 1
- Set tooltip offsets (depends on your TWikiSkins):
  - ◆ # Set TOOLTIPFIXLEFT = -163
  - ◆ # Set TOOLTIPFIXTOP = 0
- Set unknown parameter message (default: %RED% Sorry, some parameters are unknown: %UNKNOWNPARAMSLIST% %ENDCOLOR% <br/> Allowed parameters are (see TWiki.TimeTablePlugin topic for more details): %KNOWNPARAMSLIST%)
  - ◆ # Set UNKNOWNPARAMSMSG = **Following parameter(s) is/are unknown:**  
**%UNKNOWNPARAMSLIST%**

**Note:** Every attribute of %TIMETABLE% can also be used as plugin setting. You only have to use capital letters.

## Known Issues and Bugs

- font sizes larger than default font size (1em) may cause non matching timelines (browser dependent);  
workaround: don't use font sizes larger than 1em; or use px units; or set textwrapper to plugin (e.g. %TIMETABLE{textwrapper="plugin" fontsize="18pt"}%)
- some browsers (known: IE7) cut text lines of table cells with a row count equal 1 if  
textwrapper="browser" (default)  
workaround: use textwrapper="plugin" attribute

## Plugin Installation Instructions

**Note:** You do not need to install anything on the browser to use this plugin. The following instructions are for the administrator who installs the plugin on the TWiki server.

- Download the ZIP file from the Plugin web (see below)
- Install the required Perl modules (Date::Calc and POSIX), e.g: perl -MCPAN -e "install Date::Calc"
- Unzip **TimeTablePlugin.zip** in your twiki installation directory. Do not forget to change file permissions. Content:

File:	Description:
data/TWiki/TimeTablePlugin.txt	Plugin topic
data/TWiki/VarTIMETABLE.txt	Documentation
data/TWiki/VarTTCM.txt	Documentation
data/TWiki/VarTTTOPICSETUP.txt	Documentation
lib/TWiki/Plugins/TimeTablePlugin.pm	Plugin Perl module
lib/TWiki/Plugins/TimeTablePlugin/TimeTable.pm	Plugin Perl library
pub/TWiki/TimeTablePlugin/timetabletooltips.js	JavaScript library
pub/TWiki/TimeTablePlugin/example.png	example image 1
pub/TWiki/TimeTablePlugin/example2.png	example image 2

- Configure the Plugin:
  - ◆ TWiki 4.0 and up: Run the configure script to enable the Plugin
  - ◆ Change the Plugin settings as needed
- Test if the installation was successful:
  - ◆ see Examples section

## Plugin Info

Plugin Author:	<a href="#">TWiki:Main.DanielRohde</a>
Copyright:	© 2006, <a href="#">TWiki:Main.DanielRohde</a>
License:	<a href="#">GPL (GNU General Public License)</a>
Plugin Version:	V1.018 (19 Aug 2010)
Change History:	
V1.018 (19 Aug 2010)	<a href="#">TWiki:Main.DanielRohde</a> : fixed TWiki 5 problems
V1.017 (23 Oct 2009)	<a href="#">TWiki:Main.DanielRohde</a> : added hidettcm attribute requested by <a href="#">TWiki:Main.StevenCorfman</a> ; fixed line breakes in rotated tables;
V1.016 (14 Nov 2008)	<a href="#">TWiki:Main.DanielRohde</a> : added overflow:auto style; fixed unknownparamsmg bug;
V1.015 (29 Jul 2008)	<a href="#">TWiki:Main.DanielRohde</a> : fixed rotated table bugs (tooltips, showweekend="off")
V1.014 (10 Jul 2008)	<a href="#">TWiki:Main.DanielRohde</a> : added documentation requested by <a href="#">TWiki:Main.PeterThoeny</a> ; added rotated table feature requested by <a href="#">TWiki:Main.VickiBrown</a> ; fixed doc bug reported by <a href="#">TWiki:Main.JoeGainey</a>
V1.013 (24 May 2007)	<a href="#">TWiki:Main.DanielRohde</a> : fixed major time parsing bug reported by <a href="#">TWiki:Main.LarsEik</a> ; fixed major bug: events with a time range before start time should not be displayed; fixed major TTCM bug reported by <a href="#">TWiki:Main.ArthurClemens</a> ; added URL parameter feature; added new attributes (textwrapper, tableborder, tablewidth, tablecell...); added browser based text wrapping feature requested by <a href="#">TWiki:Main.ArthurClemens</a>
V1.012 (14 May 2007)	<a href="#">TWiki:Main.DanielRohde</a> : fixed readTopicText bug reported by <a href="#">TWiki:Main.JoachimRahn</a> ; added month header feature (attributes: showmonthheader, monthheader...); added new tooltip feature (clicktooltip...)
V1.011 (1 Mar 2007)	<a href="#">TWiki:Main.DanielRohde</a> : added fontsize attribute; fixed HTML bug (validation);
V1.010 (19 Feb 2007)	<a href="#">TWiki:Main.DanielRohde</a> : added tablecolumnwidth and tabledatacellwidth attributes requested by <a href="#">TWiki:Main.VickiBrown</a> ; added tooltip feature (tooltip... attributes);
V1.009 (7 Aug 2006)	<a href="#">TWiki:Main.DanielRohde</a> : added duration feature; added time zone abbreviations; improved performance; fixed conflict rendering bug; fixed time zone bugs (whole-time event handling, topic include)
V1.008 (2 Aug 2006)	<a href="#">TWiki:Main.DanielRohde</a> : added timezone feature requested by <a href="#">TWiki:Main.BenWatts</a> ; fixed major midday/midnight (12pm/12am) bug reported by <a href="#">TWiki:Main.BenWatts</a> ; fixed overlapping day bug; fixed periodic event bug; fixed minor bugs (stylesheet bug; annoying JavaScript errors; empty event row)
V1.007 (23 Jun 2006)	<a href="#">TWiki:Main.DanielRohde</a> : fixed major bug (wholetimerow: empty column)
V1.006 (23 Jun 2006)	<a href="#">TWiki:Main.DanielRohde</a> : fixed major mod_perl bug (paging in compatmode); added whole-time row feature; fixed minor bugs (empty column color; cutted text)
V1.005 (8 Jun 2006)	<a href="#">TWiki:Main.DanielRohde</a> : fixed typos (documentation); added new features (compatmode only): inline time range feature and navigation; minor improvements (table header, ...)
V1.004 (31 May 2006)	<a href="#">TWiki:Main.DanielRohde</a> : fixed typos (documentation, timeformat); added new attributes (days, forcestartdate, nowfgcolor, nowbgcolor); fixed minor bug (periodic repeater); added new event type (list)
V1.003 (24 May 2006)	<a href="#">TWiki:Main.DanielRohde</a> : added compatibility mode ( <a href="#">TWiki:Plugins.CalendarPlugin</a> event types); added documentation and new attributes; fixed bugs (bgcolor bug; conflict rendering; documentation; error logs; warnings);
V1.002 (22 May 2006)	<a href="#">TWiki:Main.DanielRohde</a> : fixed major bugs (conflict handling, preferences); added documentation;

## TimeTablePlugin < TWiki < TWiki

V1.001 (19 May 2006):	TWiki:Main.DanielRohde: fixed some major bugs (conflict entries, parameter handling, long descriptions); added documentation;
V1.000 (16 May 2006):	TWiki:Main.DanielRohde: Initial version
Dependency:	\$TWiki::Plugins::VERSION 1.021
CPAN Dependencies:	CPAN::Date::Calc CPAN::POSIX
Other Dependencies:	none
Perl Version:	5.005
Benchmarks:	GoodStyle 92%, FormattedSearch 98%, TimeTablePlugin 80%
Plugin Home:	<a href="http://TWiki.org/cgi-bin/view/Plugins/TimeTablePlugin">http://TWiki.org/cgi-bin/view/Plugins/TimeTablePlugin</a>
Feedback:	<a href="http://TWiki.org/cgi-bin/view/Plugins/TimeTablePluginDev">http://TWiki.org/cgi-bin/view/Plugins/TimeTablePluginDev</a>
Appraisal:	<a href="http://TWiki.org/cgi-bin/view/Plugins/TimeTablePluginAppraisal">http://TWiki.org/cgi-bin/view/Plugins/TimeTablePluginAppraisal</a>

**Related Topics:** TWikiPlugins, DeveloperDocumentationCategory, AdminDocumentationCategory, TWikiPreferences

-- TWiki:Main.DanielRohde - 16 May 2006

This topic: TWiki > TimeTablePlugin

Topic revision: r0 - 2007-05-16 - TWikiContributor



Copyright &© 2008-2024 by the contributing authors. All material on this collaboration platform is the property of the contributing authors.

or Ideas, requests, problems regarding TWiki? use Discourse or Send feedback

**Note:** Please contribute updates to this topic on TWiki.org at TWiki:TWiki.TimeTablePlugin